


GE/GR Couplings

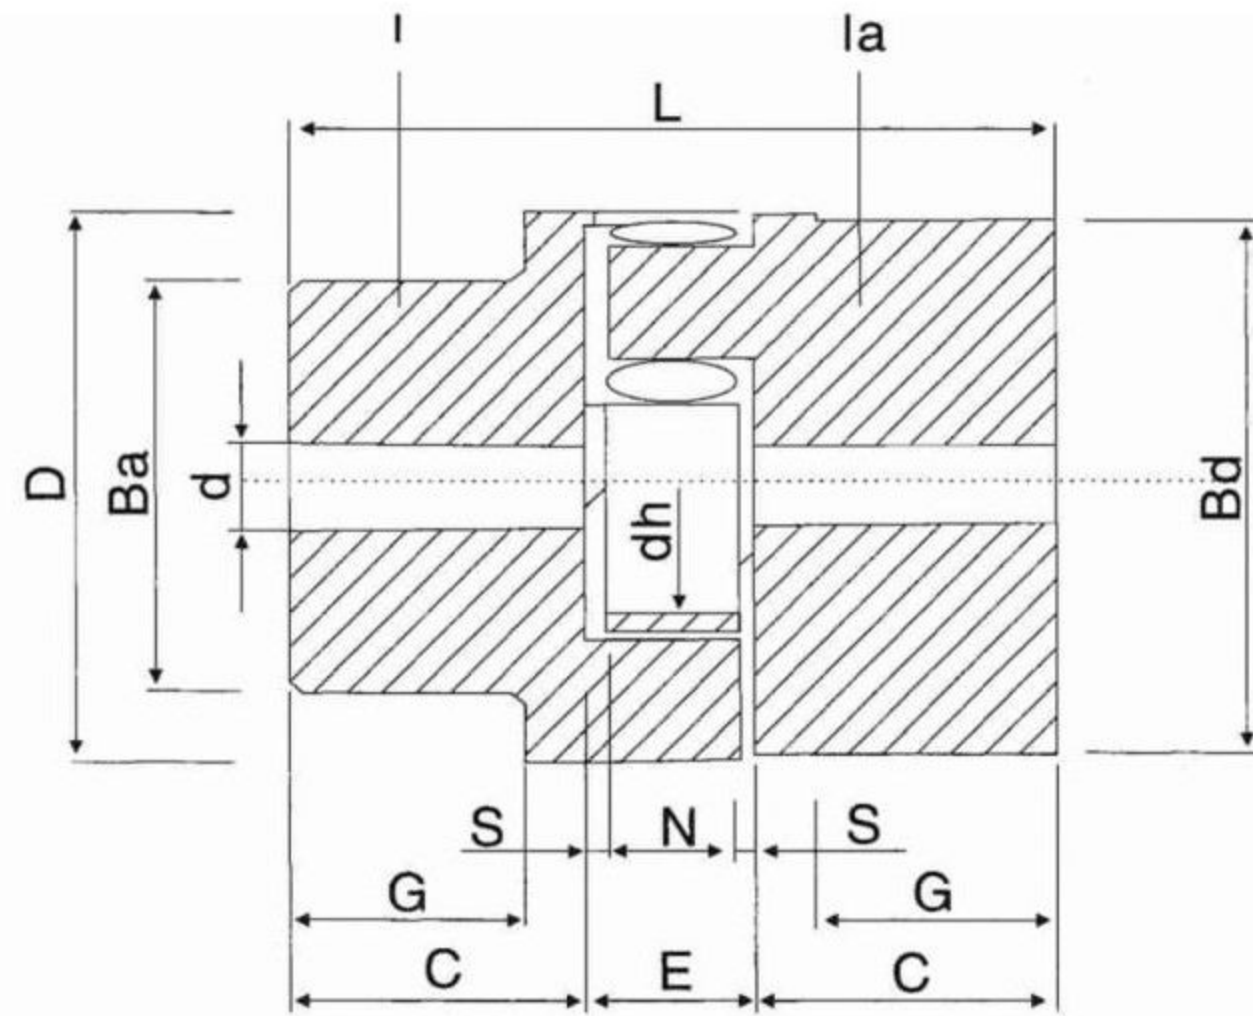

Size	Component	Spider(part2)rated rorqe(NM)Std bore				Finish bore		L	C	E	N	S	D	dh	ba:bd	G	weight (kg)
		92 Sh A	98 Sh A	64 Sh D	(d)	(d)min-max	(d)min-max										
14						4-16	35	11	13	10	1.5	30	10			045	
19/24	1	10	17	21	6	6-16	66	25	16	12	2	40	18	32	20		
	la				6	6-24								40	-	0.55	
24/32	1	35	60	75	9	9-24	78	30	18	14	2	55	27	40	24	0.95	
	la				9	9-32								55	-	1.17	
28/38	1	95	160	200	10	10-28	90	35	20	15	2.5	65	30	48	28	1.6	
	la				10	10-38								65	-	1.95	
38/45	1	190	325	405	12	12-38	114	45	24	18	3	80	38	66	37	3	
	la				12	12-45								78	-	3.8	
42/55	1	265	450	560	12	12-42	126	50	26	20	3	95	46	75	40	4.45	
	la				12	12-55								94	-	6	
48/60	1	310	525	655	12	12-48	140	56	28	21	3.5	105	51	85	45	6.15	
	la				12	12-60								104	-	8	
55/70	1	410	685	825	15	15-55	160	65	30	22	4	120	60	98	52	9.5	
	la				15	15-70								118	-	12.35	
65/75	1	625	940	1175	15	15-65	185	75	35	26	4.5	135	68	115	61	14.5	
	la				15	15-75								133	-	18.25	
75/90	1	1280	1920	2400	15	15-75	210	85	40	30	5	160	80	135	69	22.5	
	la				15	15-90								158	-	28	
90/100	1	2400	3600	4500	38	38-90	245	100	45	34	5.5	200	100	160	81	38.1	
	la				38	38-100								198	-	52	